
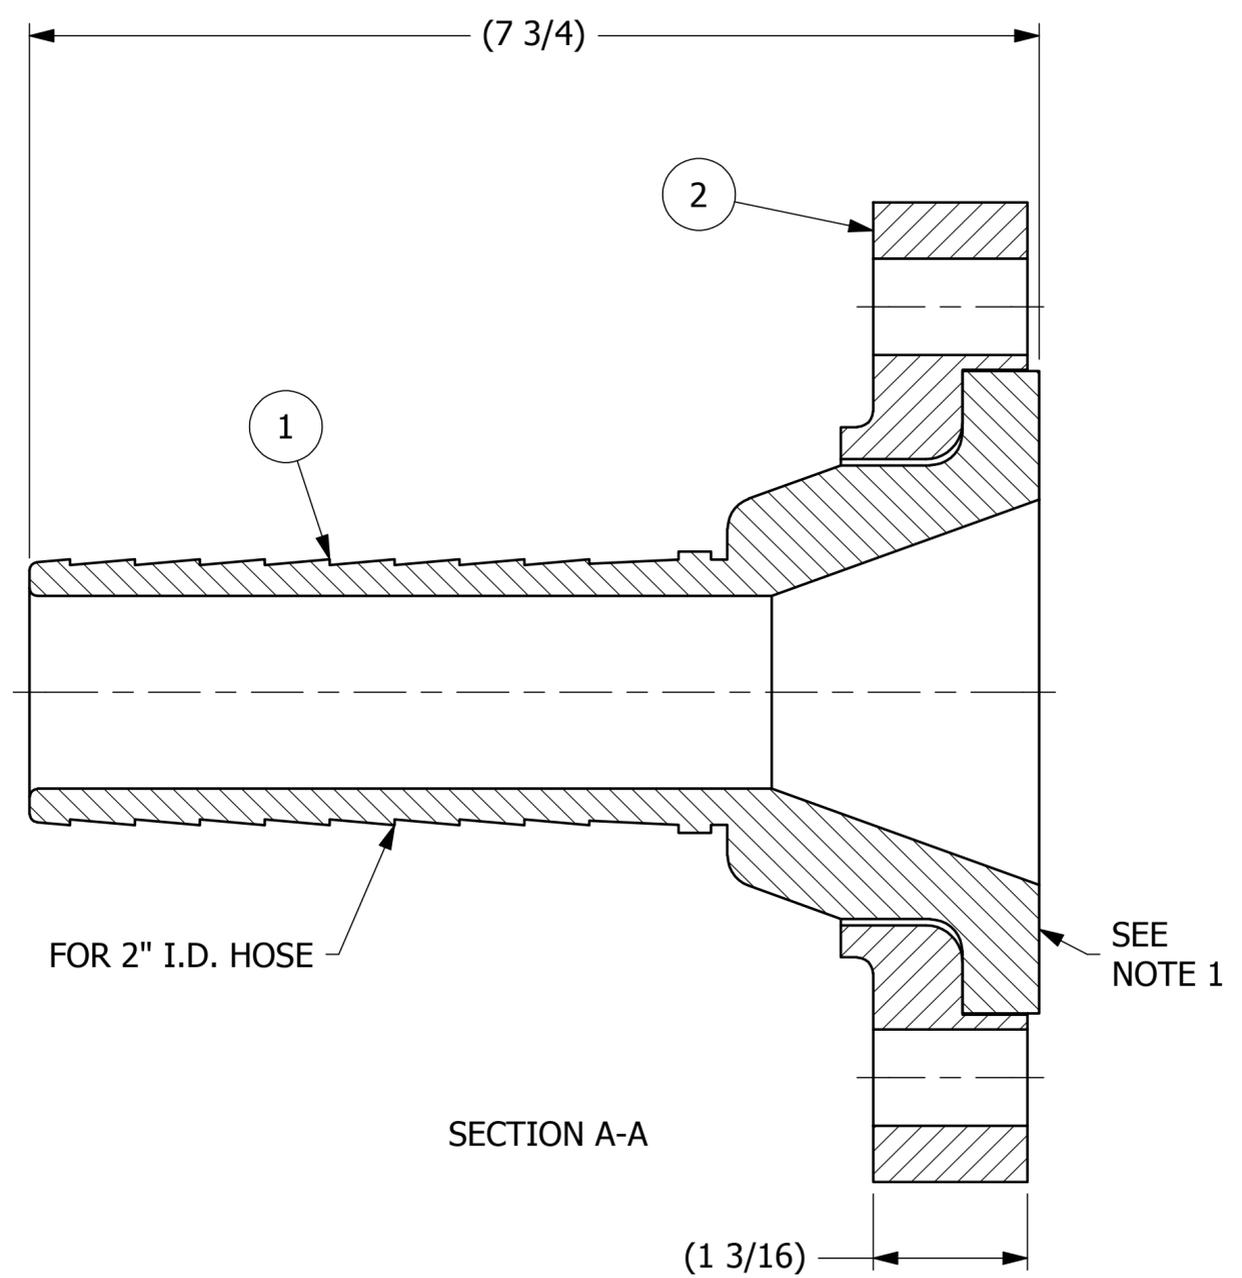


NO.	PART NAME	PART#	REQ'D	MATERIAL
1	HOSE BARB INSERT 2"	HS23HBP	1	SALCO PE
2	INSERT FLANGE 3" 150 LB	HS3FLP	1	SALCO PE

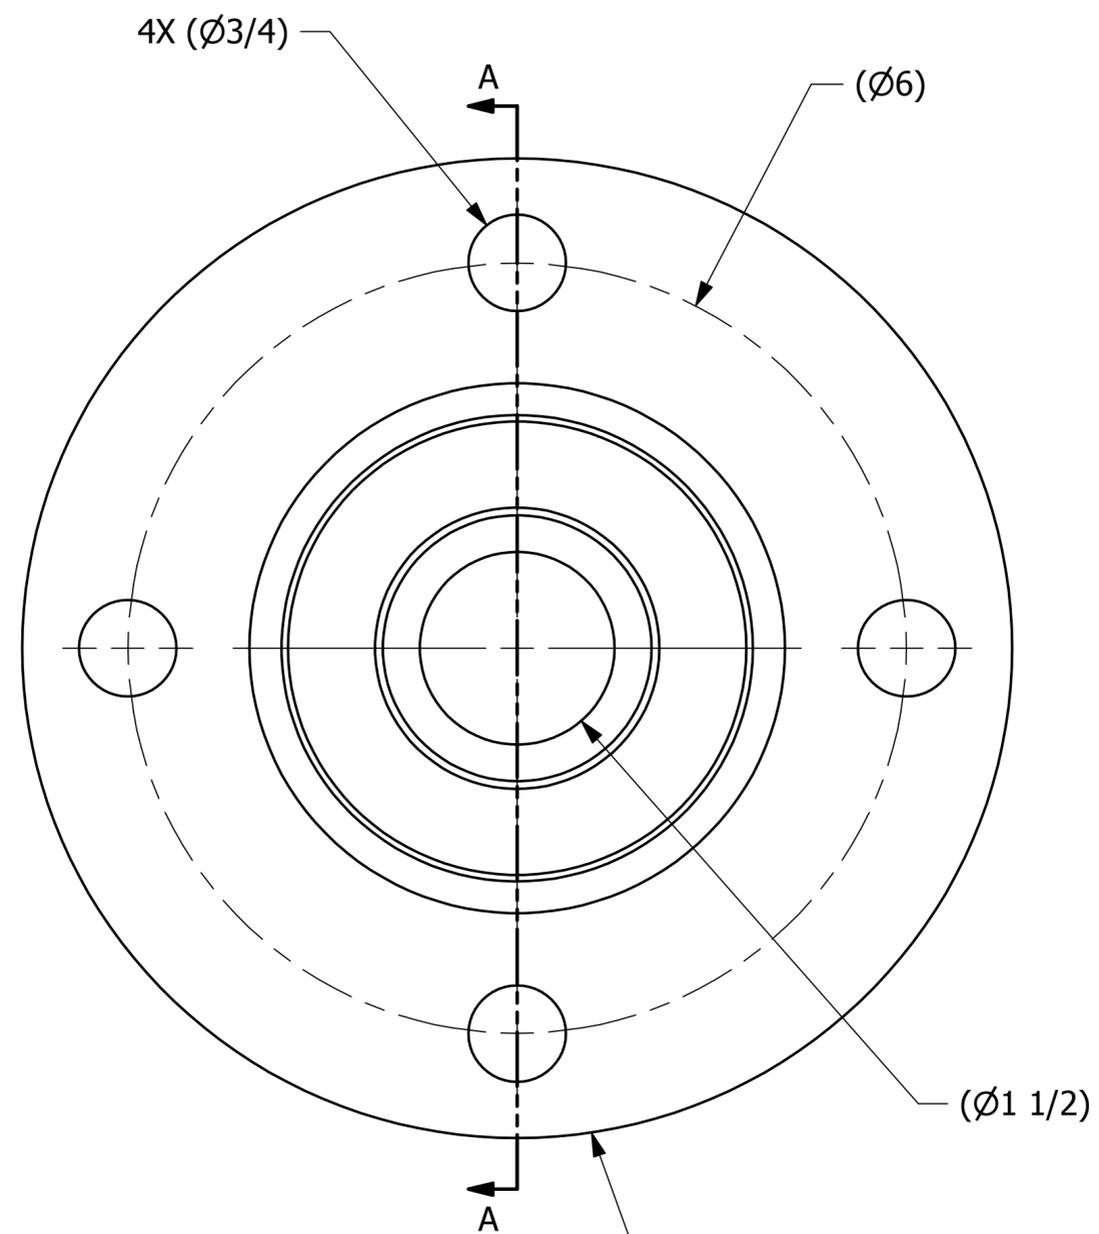

NOTE:  
 1. SEE DOCUMENT DSS 5 FOR SERRATED GASKET SURFACE.  
 2. SEE DOCUMENT QAP5A-1 FOR MARKING PROCEDURES.

MARK PER QAP5A-1  
 TEXT HEIGHT .1" MIN

REV	BY	DATE	DESCRIPTION
A	RJP	10-23-15	UPDATED TO CURRENT STANDARDS

UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES FRACTIONAL: $\pm 1/16$ X.XX: $\pm .03$ X.XXX: $\pm .015$ ANGLE: $\pm 1^\circ$ DEBURR ALL SHARP EDGES. ALL MACHINED SURFACES TO HAVE A 125 RMS FINISH UNLESS NOTED OTHERWISE. THIRD ANGLE PROJECTION	DRAWN BY:	ACC
	CHECKED BY:	VD
	PROTOTYPE BY:	ACC
	PROTOTYPE DATE:	1/5/2011
	APPROVED FOR PRODUCTION BY:	
	PRODUCTION DATE:	

**SALCO PRODUCTS, INC.**

PART NAME: **FLANGED HOSE BARB 3" X 2"**

MATERIAL: **SEE BOM**

PROJECT #: **030708** SHEET #: **1 OF 1** SCALE: **1:1**

DRAWING #: **C20210** PART #: **HS3X2FTBPY**