
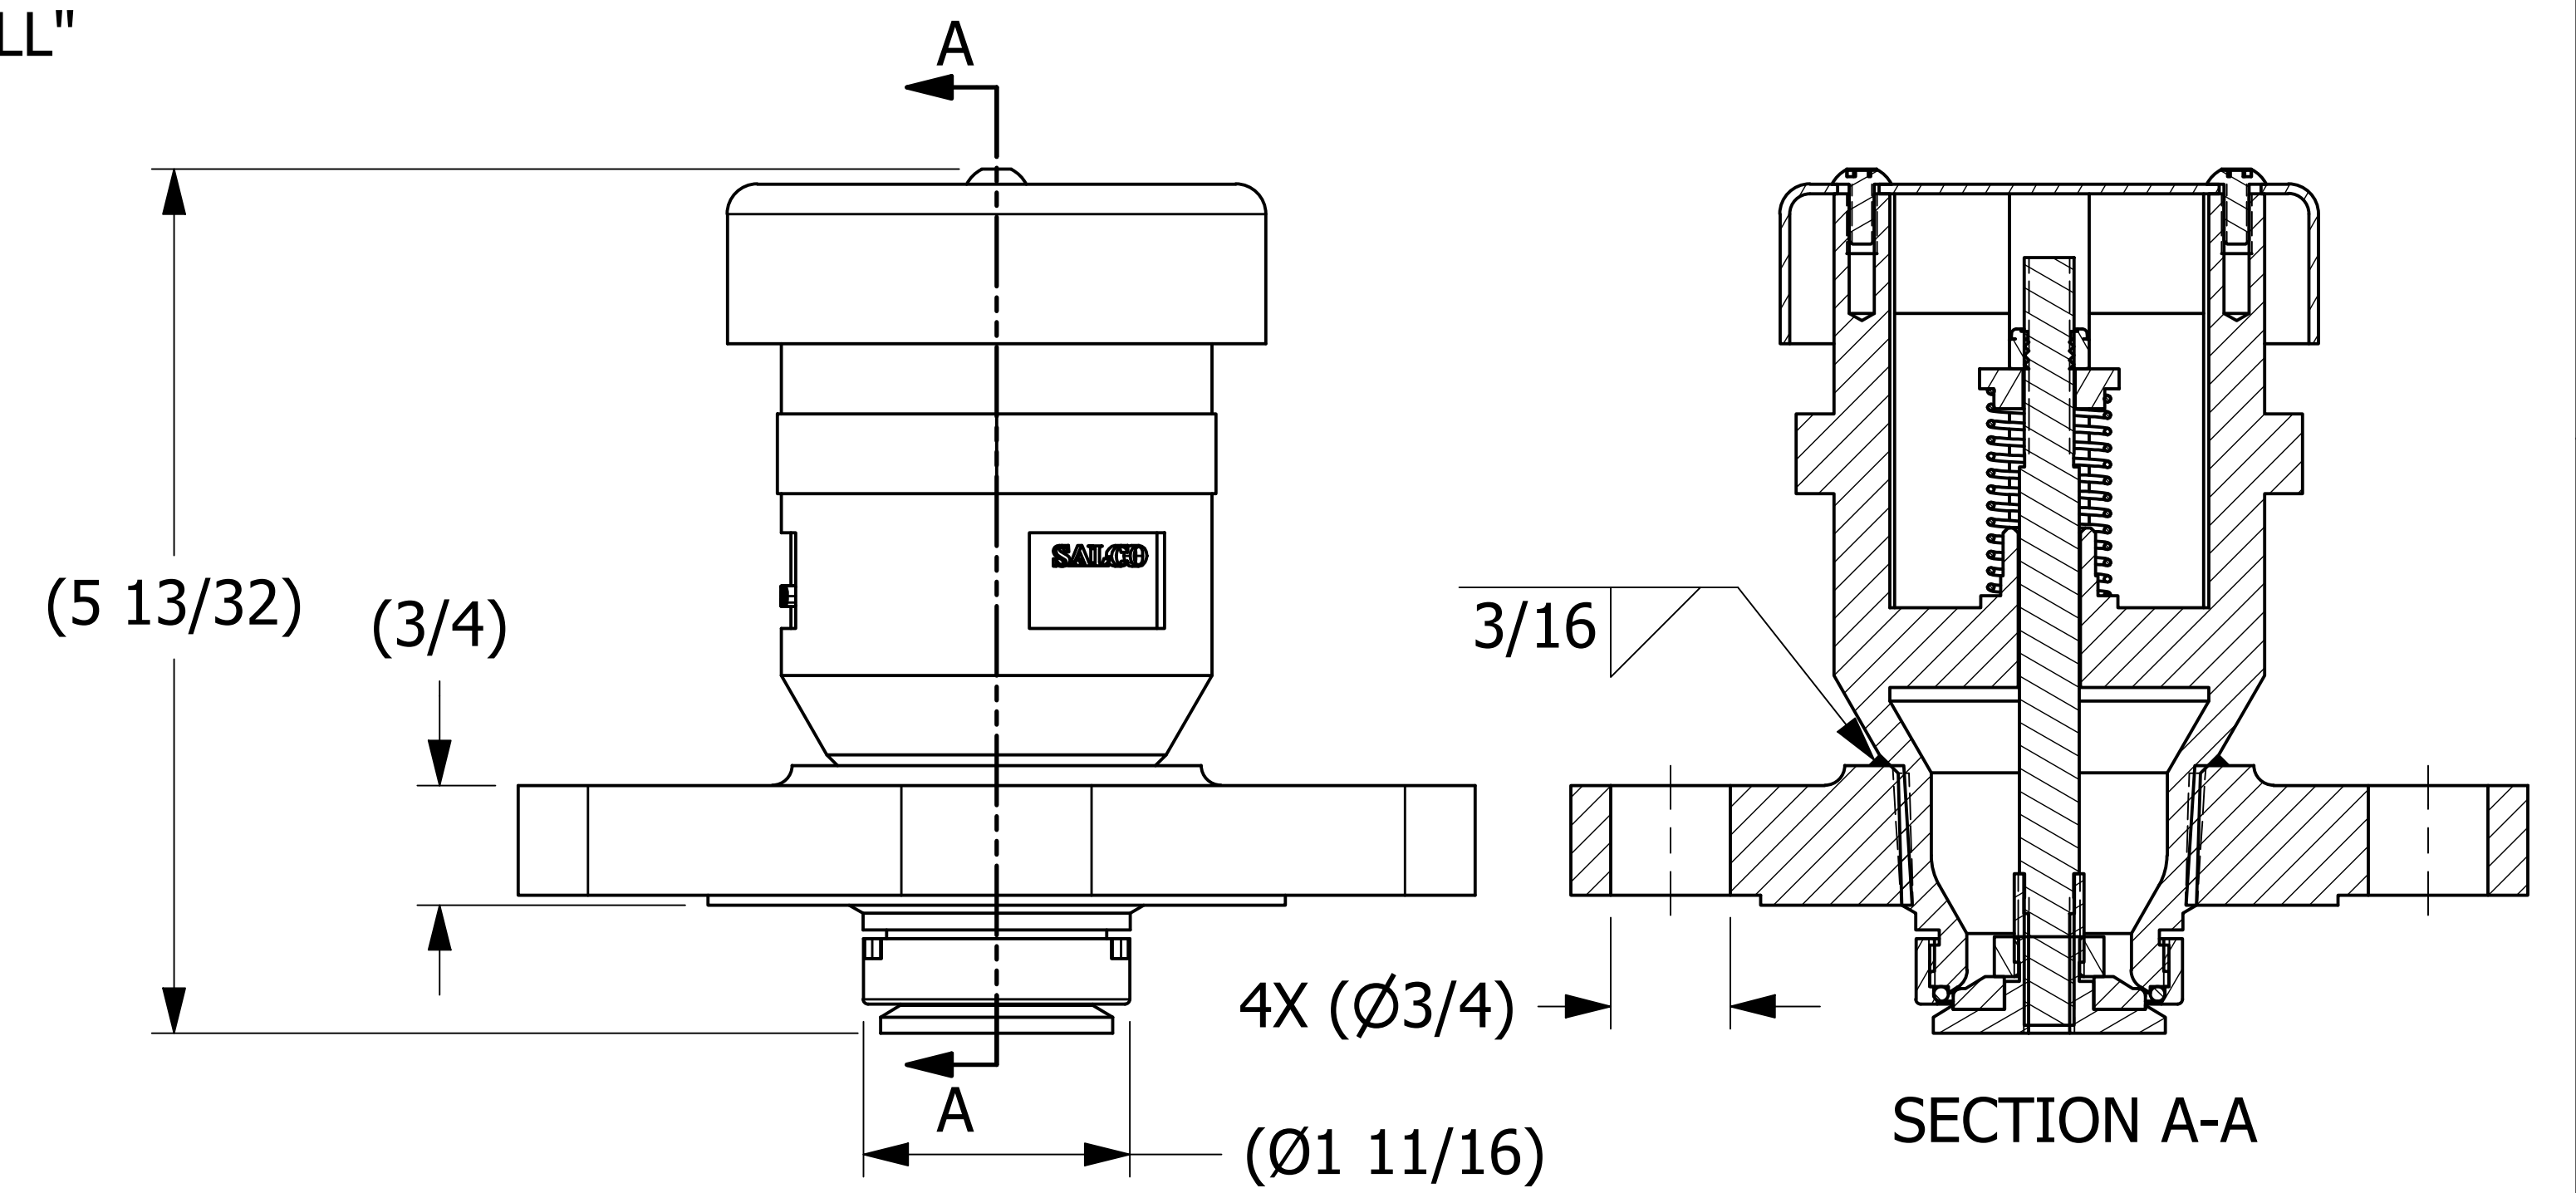


NO.	PART NAME	PART #	REQ'D	MATERIAL
1	PIPE FLANGE 4 3/4"X1 1/2" NPT	B46275	1	304 SS
2	HEX JAM NUT 7/16"-20	N716S	1	18-8 SS
3	HEX LOCK NUT 5/16"-18	R20ANS	1	18-8 SS
4	TAMPER RESISTANT SCREW 10-32 X 3/8"	TRS1032SS	2	302 SS
5	VACUUM RELIEF VALVE GASKET 1 1/2"	VV1501G	1	BLACK NITRILE
6	VACUUM RELIEF VALVE BUSHING 1 1/2"	VV15S41SB	1	303 SS
7	SPRING 3/4" X 3 5/16"	VV15S41SP	1	18-8 SS
8	VACUUM RELIEF VALVE STEM 1 1/2"	VVN15S4SA	1	304/18-8 SS
9	VACUUM RELIEF VALVE BODY ASSEMBLY 1 1/2"	VVN15S4VBA	1	304 SS
10	VACUUM RELIEF VALVE CAP	VVNS4TC	1	304 SS

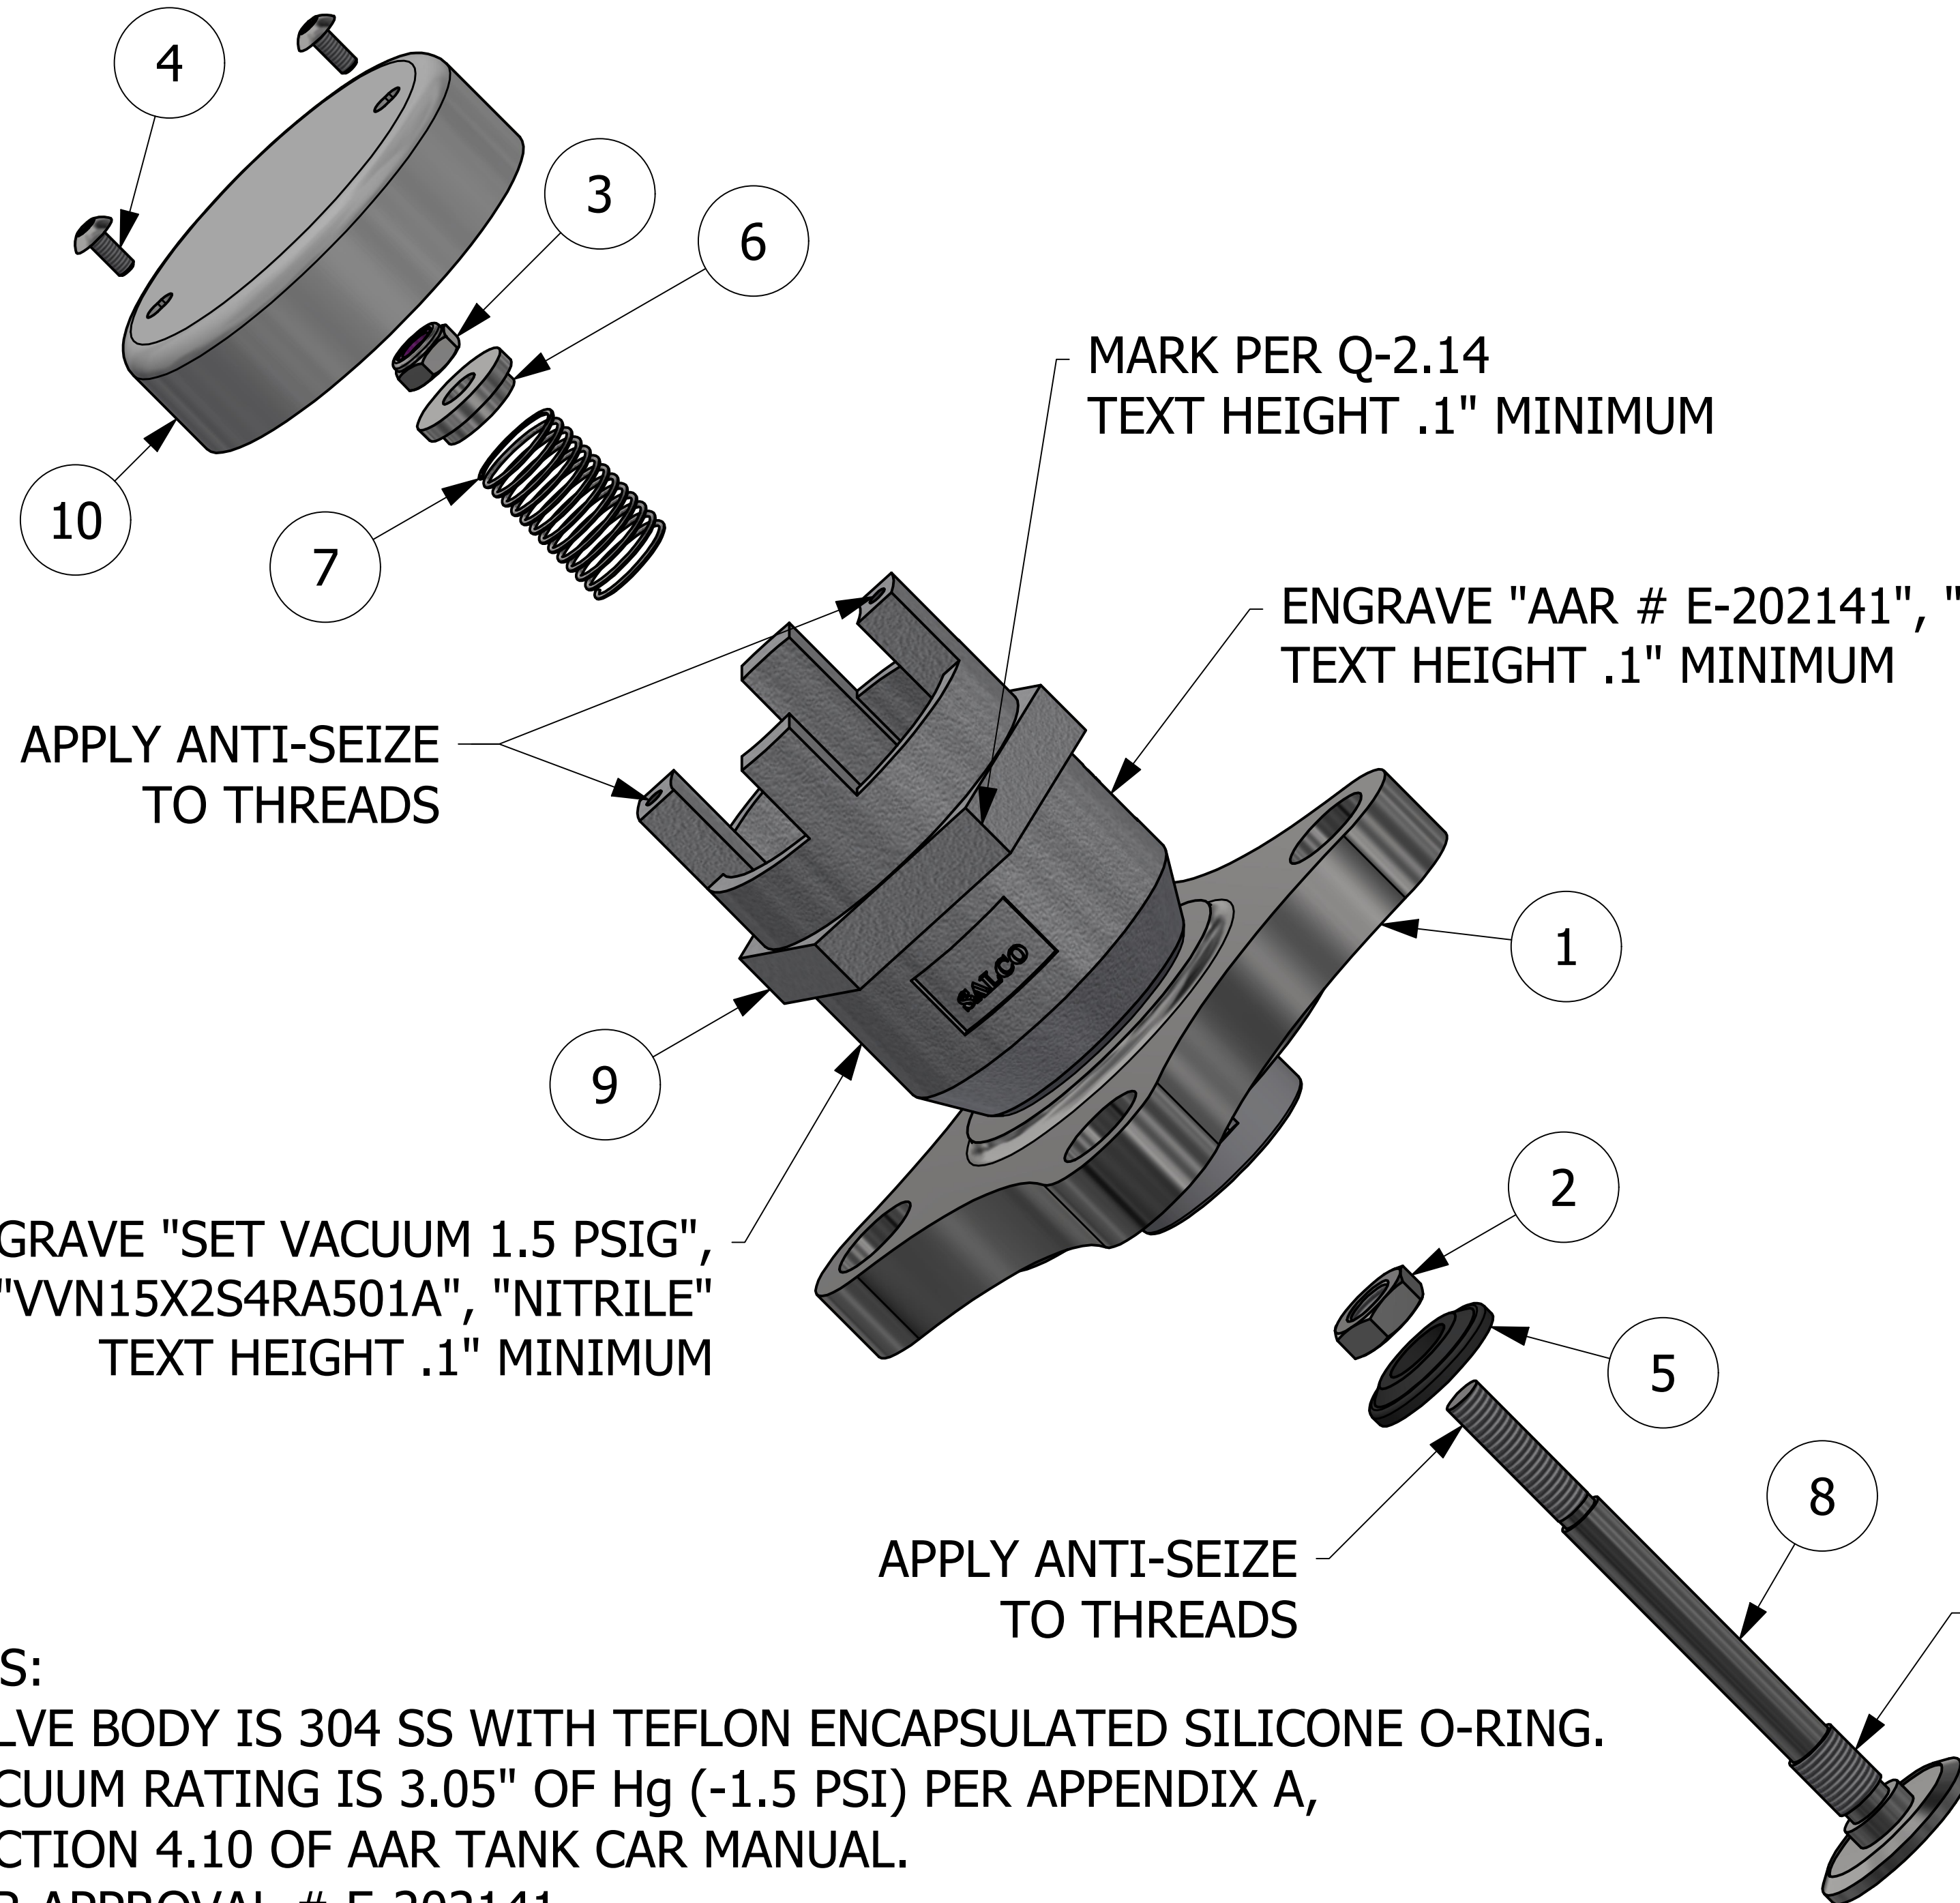

- NOTES:**
1. VALVE BODY IS 304 SS WITH TEFLON ENCAPSULATED SILICONE O-RING.
  2. VACUUM RATING IS 3.05" OF Hg (-1.5 PSI) PER APPENDIX A, SECTION 4.10 OF AAR TANK CAR MANUAL.
  3. AAR APPROVAL # E-202141.
  4. TEST PER Q-2.15.7.
  5. SEE DOCUMENT Q-2.14 FOR MARKING PROCEDURE.
  6. SEE DOCUMENTS WPS-F03, WPS-F05, WPS-M07, WPS-M10, WPS-T06, & WPS-T07 FOR WELDING PROCEDURE.
  7. WELD ACCEPTANCE CRITERIA TO MEET DOCUMENT D-005.

UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES FRACTIONAL: ±1/16 X.XX: ±.03 X.XXX: ±.015 ANGULAR: ±1° DEBURR ALL SHARP EDGES. ALL MACHINED SURFACES TO HAVE A 125 RMS FINISH UNLESS NOTED OTHERWISE. THIRD ANGLE PROJECTION	DRAWN BY:	JG
	CHECKED BY:	EJF
	PROTOTYPE DATE:	1/9/2018
	APPROVED FOR PRODUCTION BY:	VD
	PRODUCTION DATE:	1/23/2018
	SIZE:	D
	DRAWING #:	46466

C	WEB	1/24/24	UPDATED MARKINGS, REMOVED LABEL
B	WEB	9/4/20	AAR # WAS E-099034; UPDATED TITLE BLOCK; UPDATED WELD PROCEDURE; ADDED D-005 NOTE
A	CHL	1/23/18	RELEASED FOR PRODUCTION
REV	BY	DATE	DESCRIPTION

**SALCO PRODUCTS, INC.**

PART NAME: **VACUUM RELIEF VALVE 1 1/2" FLANGED**

MATERIAL: **SEE BOM**

PROJECT #: **R180109F1** SHEET #: **1 OF 1** SCALE: **1:1**

PART #: **VVN15X2S4RA501A**